

Model:
DHL995375
DHL997590
DHL9995100

Up and Down light



Features



- Aluminum Structure Anodized
- Extra High performance SMD LEDs with controlled Color consistency and Uniformity
- High-efficiency with accurate light dissipation and modularized design
- High quality aluminum heat sink providing optimized thermal path.
- Anti-Corrosion, Anti-UV
- System light Efficiency 85%
- Fire Proof PC Cover
- Warranty: 5 years



Specification

Light Source	SMD LED	SMD LED	SMD LED
Initial Luminous flux (Total)	Up: 1100lm/ Down: 2200lm	Up: 1200lm Down: 2400l	Up: 1300lm/ Down: 2800lm
CCT	3000K/4000K	3000K/4000K	3000K/4000K
Dimension (mm)	53 x 75mm	75 x 90mm	95 x 100mm
CRI	>80 >90	>80 >90	>80 >90
Power Consumption	15/30W per meter	15/30W per meter	15/30W per meter
Power Factor	>0.9	>0.9	>0.9
Material	Aluminium alloy 6063	Aluminium alloy 6063	Aluminium alloy 6063
AC Input	240vAC	240vAC	240vAC
Finish	Silver /White / Black	Silver /White / Black	Silver /White / Black
Light Beam Angle	110°	110°	110°
Dimming Option	DALI option Available	DALI option Available	DALI option Available

Optical Performance

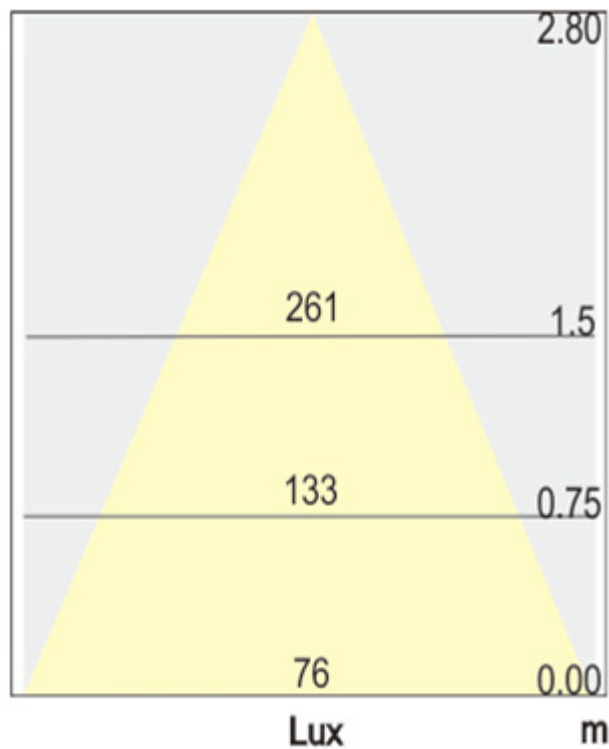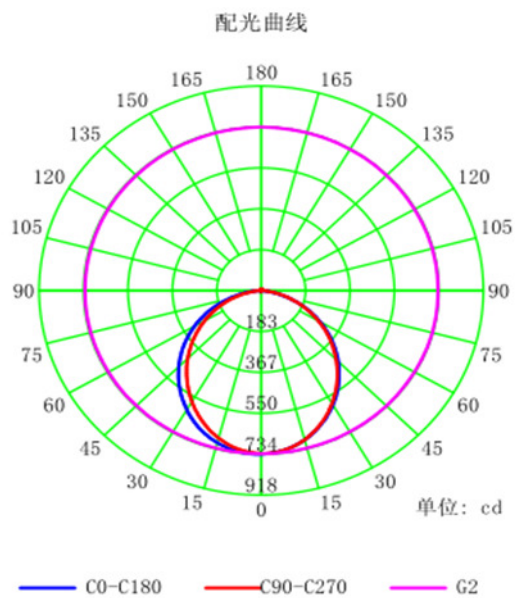

Application



CE & Energy Star Compliant

IP20



Indoors Application

- Showroom
- Product Line, Warehouse
- Shopping Area
- Conference Room
- Offices, Education facilities



Dimension

