



Sanishower®+

The low profile design enables the Sanishower®+ to be installed discreetly into a cabinet. Ideal for installing a shower and vanity.

APPLICATIONS



HAND BASIN




SHOWER



WMTS 106:2019
Certificate No. 23048
Manufacturer: SFA
Brand: Saniflo

PRODUCT REFERENCE:
SA94



TECHNICAL CHARACTERISTICS

| | |
|--------------------------|--------------------|
| Discharge Pipework | 20 mm |
| Motor Power | 400 Watts |
| Voltages | 220-240 V/50 Hz |
| Working Waste Water Temp | 35°C |
| Product Weight | 3.5 kg |
| Overall Measurements | 359 x 146 x 166 mm |
| Inlet Pipework | 40 mm |
| IP Rating | IP44 |
| Activation Level | 65 mm |



WHY CHOOSE THIS PRODUCT?

Overcomes gravity drainage issues


Allows basement showers

Can be fitted next to shower tray

Additional inlet for basin


Includes integrated carbon filter

Low activation level (65 mm)

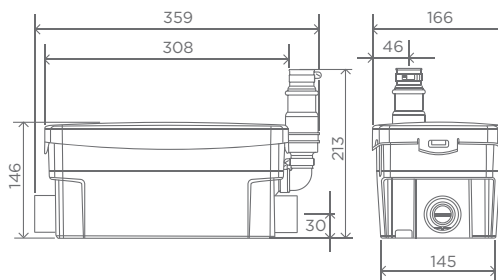

VERTICAL/HORIZONTAL PERFORMANCE

Increase size of horizontal run by one pipe size after 5m. All horizontal pipework requires a minimum of 1:100 fall.

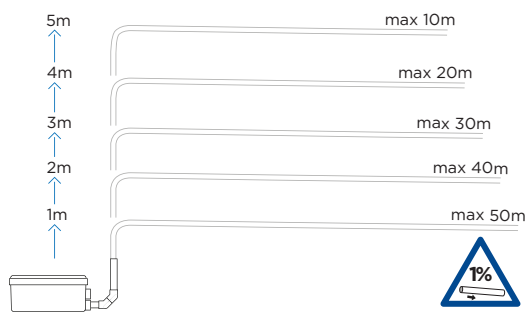

FLOW RATE PERFORMANCE CHART

