

SOLIDAL® PMP U Series (U1-100)

SOLIDAL® PRODUCT SPECIFICATION

Model	SOLIDAL® PMP U1-100
Material	Certified Low Carbon Aluminium
Carbon Footprint	7.1kgCO ₂ e Certified CQM2023CFP193
Coating Process	Post applied after mill metal formed modules
Recyclability Content	100% cradle to cradle recyclable product

Thickness	T2® (2mm), T3® (3mm), T4® (4mm), T5® (5mm), T6® (6mm)
Max Length	Up to 6000mm* (Custom)
Width	754mm
Rib Height (Rh)	100mm
Rib Distance (Rd)	150mm

Perforation Design

Round, Square, Triangular, Slotted, Custom Design

Perforation Open Area Porosity

Open Area % available (Non-perforated Optional)

Perforation Dimension

Custom Size available

Perforation Pattern

90°, 45°, 60°, Custom

Attachment Methods:

Fixing Span: up to 6000mm

Mechanically fixed to sub-frame

Optional corner moulds available

Colours and Finishes

Powder Coat (Akzonobel Interpon / Dulux Duratec) or PVDF Wet Spray (P.P.G) in unlimited colours, single side or double side coating. Anodise Finish. (Colour Matching available)

Compliance:

Non-combustible NCC2019C1.9.


NATA AS1530.1 & AS1530.3 Certified

Supplier: SOLIDAL®

Phone number: 1300 252 325

Email: info@solidal.com


SOLIDAL® U1-100

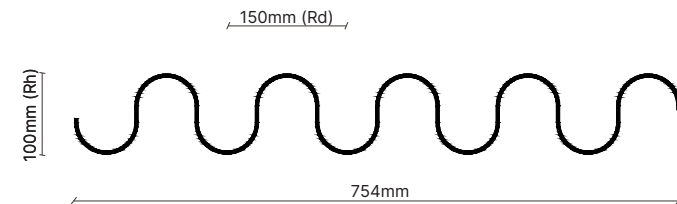

SPECIFICATION EXAMPLE:

Project X

EXTERNAL FINISHES SCHEDULES

CODE	MATERIAL	AREA	DESCRIPTION	COMMENTS	IMAGE	SUPPLIER	REV
EXTERNAL CLADDING							
EC-100	Aluminium Facade Cladding	Facade	Model: SOLIDAL® PMP U1-100 Thickness: T3® (3mm) TBC Perforation Design: Round TBC Perforation Open Area: 50% TBC Perforation Dimension: 10mmØ TBC Perforation Pattern: 45° TBC Colours: Powdercoat Matt finish / Monument TBC	Material: Certified Low Carbon Aluminium Coating Process: Post applied after mill metal formed modules Compliance: Non-combustible NCC2019C1.9. / NATA AS1530.1 & AS1530.3 Certified Recyclability Content: 100% cradle to cradle recyclable product Carbon Footprint: 7.1kgCO ₂ e Certified CQM2023CFP193		SOLIDAL® info@solidal.com 1300252325	1

SOLIDAL® PMP U Series (U1-148)

SOLIDAL® PRODUCT SPECIFICATION

Model	SOLIDAL® PMP U1-148
Material	Certified Low Carbon Aluminium
Carbon Footprint	7.1kgCO ₂ e Certified CQM2023CFP193
Coating Process	Post applied after mill metal formed modules
Recyclability Content	100% cradle to cradle recyclable product

Thickness	T2® (2mm), T3® (3mm), T4® (4mm), T5® (5mm), T6® (6mm)
Max Length	Up to 6000mm* (Custom)
Width	904mm
Rib Height (Rh)	148mm
Rib Distance (Rd)	225mm

Perforation Design

Round, Square, Triangular, Slotted, Custom Design

Perforation Open Area Porosity

Open Area % available (Non-perforated Optional)

Perforation Dimension

Custom Size available

Perforation Pattern

90°, 45°, 60°, Custom

Attachment Methods:

Fixing Span: up to 6000mm

Mechanically fixed to sub-frame

Optional corner moulds available

Colours and Finishes

Powder Coat (Akzonobel Interpon / Dulux Duratec) or PVDF Wet Spray (P.P.G) in unlimited colours, single side or double side coating. Anodise Finish. (Colour Matching available)

Compliance:

Non-combustible NCC2019C1.9.



NATA AS1530.1 & AS1530.3 Certified

Supplier: SOLIDAL®

Phone number: 1300 252 325

Email: info@solidal.com


SOLIDAL® U1-148

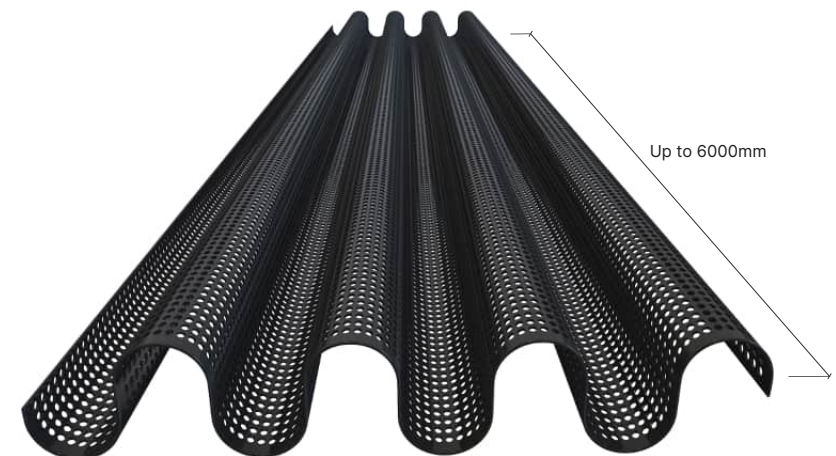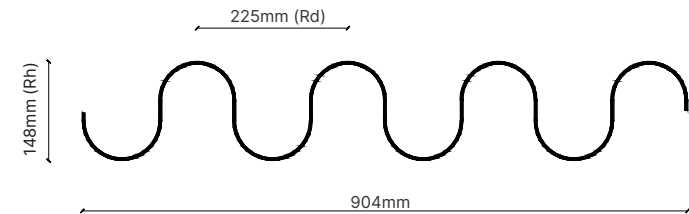

SPECIFICATION EXAMPLE:

Project X

EXTERNAL FINISHES SCHEDULES

CODE	MATERIAL	AREA	DESCRIPTION	COMMENTS	IMAGE	SUPPLIER	REV
EXTERNAL CLADDING							
EC-100	Aluminium Facade Cladding	Facade	Model: SOLIDAL® PMP U1-148 Thickness: T3® (3mm) TBC Perforation Design: Round TBC Perforation Open Area: 50% TBC Perforation Dimension: 10mmØ TBC Perforation Pattern: 45° TBC Colour: Powdercoat Matt finish / Monument TBC	Material: Certified Low Carbon Aluminium Coating Process: Post applied after mill metal formed modules Compliance: Non-combustible NCC2019C1.9. / NATA AS1530.1 & AS1530.3 Certified Recyclability Content: 100% cradle to cradle recyclable product Carbon Footprint: 7.1kgCO ₂ e Certified CQM2023CFP193		SOLIDAL® info@solidal.com 1300252325	1

SOLIDAL® PMP U Series (U1-196)

SOLIDAL® PRODUCT SPECIFICATION

Model	SOLIDAL® PMP U1-196
Material	Certified Low Carbon Aluminium
Carbon Footprint	7.1kgCO ₂ e Certified CQM2023CFP193
Coating Process	Post applied after mill metal formed modules
Recyclability Content	100% cradle to cradle recyclable product

Thickness	T2® (2mm), T3® (3mm), T4® (4mm), T5® (5mm), T6® (6mm)
Max Length	Up to 6000mm* (Custom)
Width	904mm
Rib Height (Rh)	196mm
Rib Distance (Rd)	300mm

Perforation Design

Round, Square, Triangular, Slotted, Custom Design

Perforation Open Area Porosity

Open Area % available (Non-perforated Optional)

Perforation Dimension

Custom Size available

Perforation Pattern

90°, 45°, 60°, Custom

Attachment Methods:

Fixing Span: up to 6000mm

Mechanically fixed to sub-frame

Optional corner moulds available

Colours and Finishes

Powder Coat (Akzonobel Interpon / Dulux Duratec) or PVDF Wet Spray (P.P.G) in unlimited colours, single side or double side coating. Anodise Finish. (Colour Matching available)

Compliance:

Non-combustible NCC2019C1.9.



NATA AS1530.1 & AS1530.3 Certified

Supplier: SOLIDAL®

Phone number: 1300 252 325

Email: info@solidal.com


SOLIDAL® U1-196

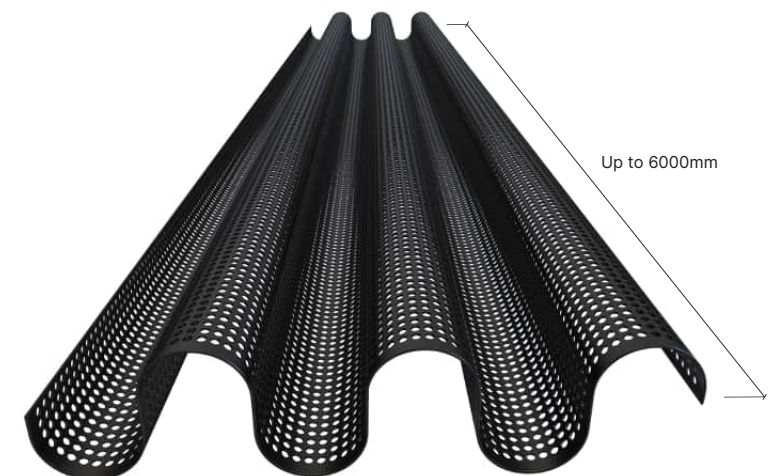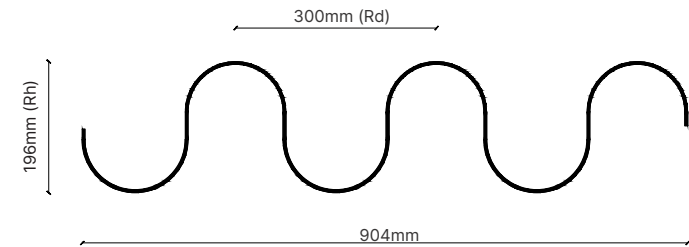

SPECIFICATION EXAMPLE:

Project X

EXTERNAL FINISHES SCHEDULES

CODE	MATERIAL	AREA	DESCRIPTION	COMMENTS	IMAGE	SUPPLIER	REV
EXTERNAL CLADDING							
EC-100	Aluminium Facade Cladding	Facade	Model: SOLIDAL® PMP U1-196 Thickness: T3® (3mm) TBC Perforation Design: Round TBC Perforation Open Area: 50% TBC Perforation Dimension: 10mmØ TBC Perforation Pattern: 45° TBC Colour: Powdercoat Matt finish / Monument TBC	Material: Certified Low Carbon Aluminium Coating Process: Post applied after mill metal formed modules Compliance: Non-combustible NCC2019C1.9. / NATA AS1530.1 & AS1530.3 Certified Recyclability Content: 100% cradle to cradle recyclable product Carbon Footprint: 7.1kgCO ₂ e Certified CQM2023CFP193		SOLIDAL® info@solidal.com 1300252325	1

SOLIDAL® PMP U Series (U2-125)

SOLIDAL® PRODUCT SPECIFICATION

Model	SOLIDAL® PMP U2-125
Material	Certified Low Carbon Aluminium
Carbon Footprint	7.1kgCO ₂ e Certified CQM2023CFP193
Coating Process	Post applied after mill metal formed modules
Recyclability Content	100% cradle to cradle recyclable product

Thickness	T2® (2mm), T3® (3mm), T4® (4mm), T5® (5mm), T6® (6mm)
Max Length	Up to 6000mm* (Custom)
Width	624mm
Rib Height (Rh)	125mm
Rib Distance (Rd)	155mm

Perforation Design

Round, Square, Triangular, Slotted, Custom Design

Perforation Open Area Porosity

Open Area % available (Non-perforated Optional)

Perforation Dimension

Custom Size available

Perforation Pattern

90°, 45°, 60°, Custom

Attachment Methods:

Fixing Span: up to 6000mm

Mechanically fixed to sub-frame

Optional corner moulds available

Colours and Finishes

Powder Coat (Akzonobel Interpon / Dulux Duratec) or PVDF Wet Spray (P.P.G) in unlimited colours, single side or double side coating. Anodise Finish. (Colour Matching available)

Compliance:

Non-combustible NCC2019C1.9.


NATA AS1530.1 & AS1530.3 Certified

Supplier: SOLIDAL®

Phone number: 1300 252 325

Email: info@solidal.com


SOLIDAL® U2-125

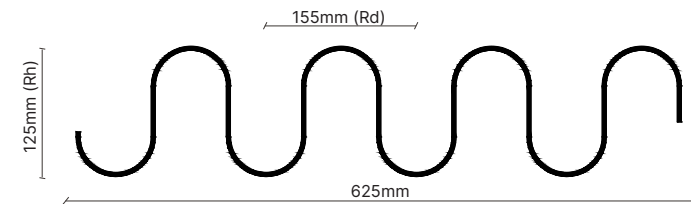

SPECIFICATION EXAMPLE:

Project X

EXTERNAL FINISHES SCHEDULES

CODE	MATERIAL	AREA	DESCRIPTION	COMMENTS	IMAGE	SUPPLIER	REV
EXTERNAL CLADDING							
EC-100	Aluminium Facade Cladding	Facade	Model: SOLIDAL® PMP U2-125 Thickness: T3® (3mm) TBC Perforation Design: Round TBC Perforation Open Area: 50% TBC Perforation Dimension: 10mmØ TBC Perforation Pattern: 45° TBC Colours: Powdercoat Matt finish / Monument TBC	Material: Certified Low Carbon Aluminium Coating Process: Post applied after mill metal formed modules Compliance: Non-combustible NCC2019C1.9. / NATA AS1530.1 & AS1530.3 Certified Recyclability Content: 100% cradle to cradle recyclable product Carbon Footprint: 7.1kgCO ₂ e Certified CQM2023CFP193		SOLIDAL® info@solidal.com 1300252325	1

SOLIDAL® PMP U Series (U2-175)

SOLIDAL® PRODUCT SPECIFICATION

Model	SOLIDAL® PMP U2-175
Material	Certified Low Carbon Aluminium
Carbon Footprint	7.1kgCO ₂ e Certified CQM2023CFP193
Coating Process	Post applied after mill metal formed modules
Recyclability Content	100% cradle to cradle recyclable product

Thickness	T2® (2mm), T3® (3mm), T4® (4mm), T5® (5mm), T6® (6mm)
Max Length	Up to 6000mm* (Custom)
Width	604mm
Rib Height (Rh)	175mm
Rib Distance (Rd)	150mm

Perforation Design

Round, Square, Triangular, Slotted, Custom Design

Perforation Open Area Porosity

Open Area % available (Non-perforated Optional)

Perforation Dimension

Custom Size available

Perforation Pattern

90°, 45°, 60°, Custom

Attachment Methods:

Fixing Span: up to 6000mm

Mechanically fixed to sub-frame

Optional corner moulds available

Colours and Finishes

Powder Coat (Akzonobel Interpon / Dulux Duratec) or PVDF Wet Spray (P.P.G) in unlimited colours, single side or double side coating. Anodise Finish. (Colour Matching available)

Compliance:

Non-combustible NCC2019C1.9.


NATA AS1530.1 & AS1530.3 Certified

Supplier: SOLIDAL®

Phone number: 1300 252 325

Email: info@solidal.com


SOLIDAL® U2-175

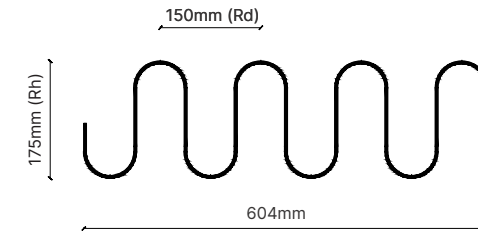

SPECIFICATION EXAMPLE:

Project X

EXTERNAL FINISHES SCHEDULES

CODE	MATERIAL	AREA	DESCRIPTION	COMMENTS	IMAGE	SUPPLIER	REV
EXTERNAL CLADDING							
EC-100	Aluminium Facade Cladding	Facade	Model: SOLIDAL® PMP U2-175 Thickness: T3® (3mm) TBC Perforation Design: Round TBC Perforation Open Area: 50% TBC Perforation Dimension: 10mmØ TBC Perforation Pattern: 45° TBC Colours: Powdercoat Matt finish / Monument TBC	Material: Certified Low Carbon Aluminium Coating Process: Post applied after mill metal formed modules Compliance: Non-combustible NCC2019C1.9. / NATA AS1530.1 & AS1530.3 Certified Recyclability Content: 100% cradle to cradle recyclable product Carbon Footprint: 7.1kgCO ₂ e Certified CQM2023CFP193		SOLIDAL® info@solidal.com 1300252325	1

SOLIDAL® PMP U Series (U3-145)

SOLIDAL® PRODUCT SPECIFICATION

Model	SOLIDAL® PMP U3-145
Material	Certified Low Carbon Aluminium
Carbon Footprint	7.1kgCO ₂ e Certified CQM2023CFP193
Coating Process	Post applied after mill metal formed modules
Recyclability Content	100% cradle to cradle recyclable product

Thickness	T2® (2mm), T3® (3mm), T4® (4mm), T5® (5mm), T6® (6mm)
Max Length	Up to 6000mm* (Custom)
Width	800mm
Rib Height (Rh)	145mm
Rib Distance (Rd)	200mm

Perforation Design

Round, Square, Triangular, Slotted, Custom Design

Perforation Open Area Porosity

Open Area % available (Non-perforated Optional)

Perforation Dimension

Custom Size available

Perforation Pattern

90°, 45°, 60°, Custom

Attachment Methods:

Fixing Span: up to 6000mm

Mechanically fixed to sub-frame

Optional corner moulds available

Colours and Finishes

Powder Coat (Akzonobel Interpon / Dulux Duratec) or PVDF Wet Spray (P.P.G) in unlimited colours, single side or double side coating. Anodise Finish. (Colour Matching available)

Compliance:

Non-combustible NCC2019C1.9.



NATA AS1530.1 & AS1530.3 Certified

Supplier: SOLIDAL®

Phone number: 1300 252 325

Email: info@solidal.com


SOLIDAL® U3-145

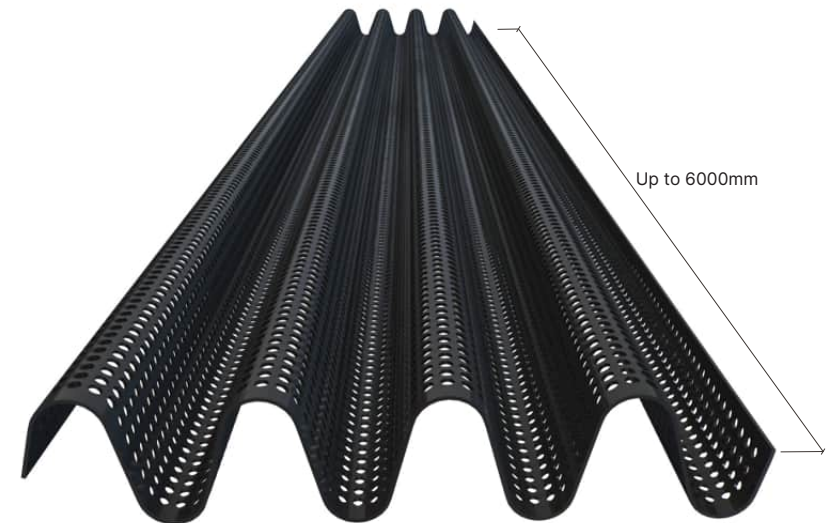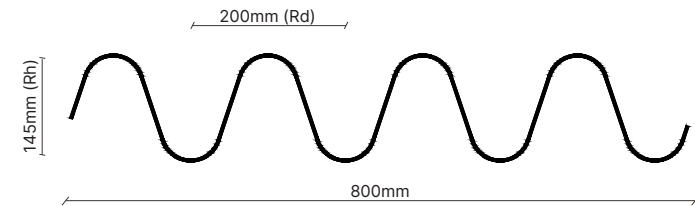

SPECIFICATION EXAMPLE:

Project X

EXTERNAL FINISHES SCHEDULES

CODE	MATERIAL	AREA	DESCRIPTION	COMMENTS	IMAGE	SUPPLIER	REV
EXTERNAL CLADDING							
EC-100	Aluminium Facade Cladding	Facade	Model: SOLIDAL® PMP U3-145 Thickness: T3® (3mm) TBC Perforation Design: Round TBC Perforation Open Area: 50% TBC Perforation Dimension: 10mmØ TBC Perforation Pattern: 45° TBC Colour: Powdercoat Matt finish / Monument TBC	Material: Certified Low Carbon Aluminium Coating Process: Post applied after mill metal formed modules Compliance: Non-combustible NCC2019C1.9. / NATA AS1530.1 & AS1530.3 Certified Recyclability Content: 100% cradle to cradle recyclable product Carbon Footprint: 7.1kgCO ₂ e Certified CQM2023CFP193		SOLIDAL® info@solidal.com 1300252325	1

SOLIDAL® PMP U Series (U3-185)

SOLIDAL® PRODUCT SPECIFICATION

Model	SOLIDAL® PMP U3-185
Material	Certified Low Carbon Aluminium
Carbon Footprint	7.1kgCO ₂ e Certified CQM2023CFP193
Coating Process	Post applied after mill metal formed modules
Recyclability Content	100% cradle to cradle recyclable product

Thickness	T2® (2mm), T3® (3mm), T4® (4mm), T5® (5mm), T6® (6mm)
Max Length	Up to 6000mm* (Custom)
Width	803mm
Rib Height (Rh)	145mm
Rib Distance (Rd)	200mm

Perforation Design

Round, Square, Triangular, Slotted, Custom Design

Perforation Open Area Porosity

Open Area % available (Non-perforated Optional)

Perforation Dimension

Custom Size available

Perforation Pattern

90°, 45°, 60°, Custom

Attachment Methods:

Fixing Span: up to 6000mm

Mechanically fixed to sub-frame

Optional corner moulds available

Colours and Finishes

Powder Coat (Akzonobel Interpon / Dulux Duratec) or PVDF Wet Spray (P.P.G) in unlimited colours, single side or double side coating. Anodise Finish. (Colour Matching available)

Compliance:

Non-combustible NCC2019C1.9.



NATA AS1530.1 & AS1530.3 Certified

Supplier: SOLIDAL®

Phone number: 1300 252 325

Email: info@solidal.com


SOLIDAL® U3-185

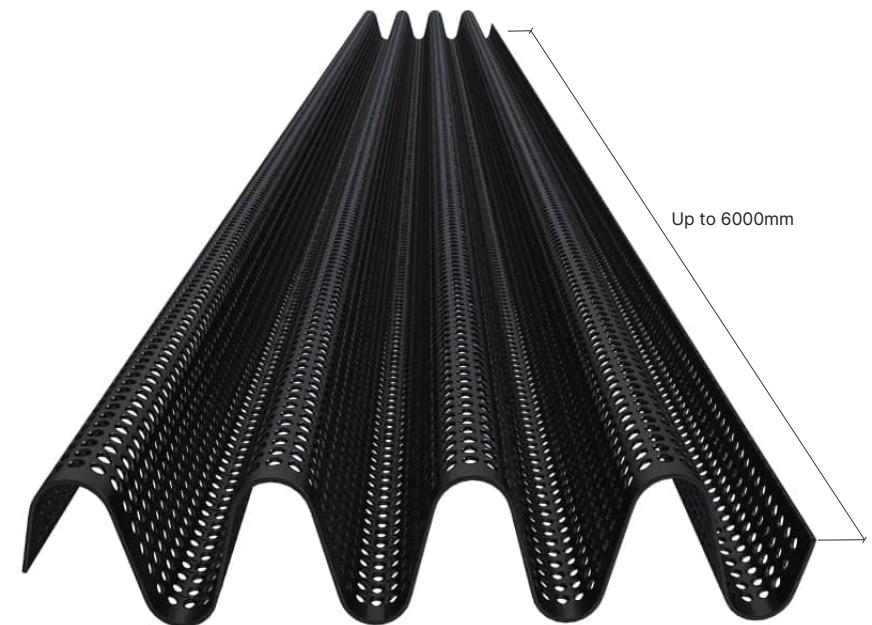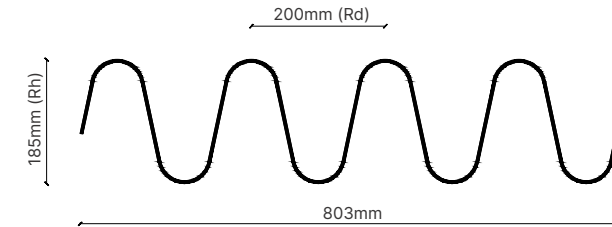

SPECIFICATION EXAMPLE:

Project X

EXTERNAL FINISHES SCHEDULES

CODE	MATERIAL	AREA	DESCRIPTION	COMMENTS	IMAGE	SUPPLIER	REV
EXTERNAL CLADDING							
EC-100	Aluminium Facade Cladding	Facade	Model: SOLIDAL® PMP U3-185 Thickness: T3® (3mm) TBC Perforation Design: Round TBC Perforation Open Area: 50% TBC Perforation Dimension: 10mmØ TBC Perforation Pattern: 45° TBC Colour: Powdercoat Matt finish / Monument TBC	Material: Certified Low Carbon Aluminium Coating Process: Post applied after mill metal formed modules Compliance: Non-combustible NCC2019C1.9. / NATA AS1530.1 & AS1530.3 Certified Recyclability Content: 100% cradle to cradle recyclable product Carbon Footprint: 7.1kgCO ₂ e Certified CQM2023CFP193		SOLIDAL® info@solidal.com 1300252325	1

SOLIDAL® PMP U Series (U3-225)

SOLIDAL® PRODUCT SPECIFICATION

Model	SOLIDAL® PMP U3-225
Material	Certified Low Carbon Aluminium
Carbon Footprint	7.1kgCO ₂ e Certified CQM2023CFP193
Coating Process	Post applied after mill metal formed modules
Recyclability Content	100% cradle to cradle recyclable product

Thickness	T2® (2mm), T3® (3mm), T4® (4mm), T5® (5mm), T6® (6mm)
Max Length	Up to 6000mm* (Custom)
Width	603mm
Rib Height (Rh)	225mm
Rib Distance (Rd)	200mm

Perforation Design

Round, Square, Triangular, Slotted, Custom Design

Perforation Open Area Porosity

Open Area % available (Non-perforated Optional)

Perforation Dimension

Custom Size available

Perforation Pattern

90°, 45°, 60°, Custom

Attachment Methods:

Fixing Span: up to 6000mm

Mechanically fixed to sub-frame

Optional corner moulds available

Colours and Finishes

Powder Coat (Akzonobel Interpon / Dulux Duratec) or PVDF Wet Spray (P.P.G) in unlimited colours, single side or double side coating. Anodise Finish. (Colour Matching available)

Compliance:

Non-combustible NCC2019C1.9.



NATA AS1530.1 & AS1530.3 Certified

Supplier: SOLIDAL®

Phone number: 1300 252 325

Email: info@solidal.com


SOLIDAL® U3-225

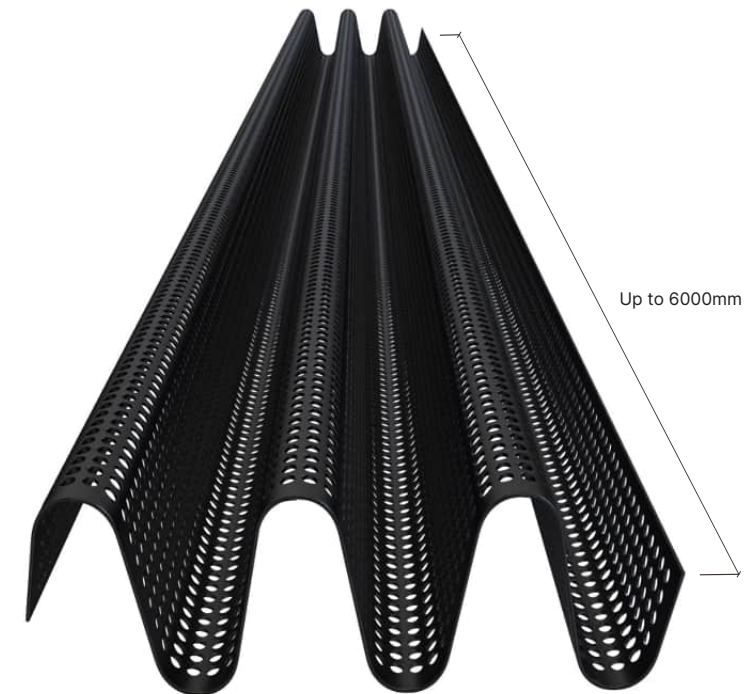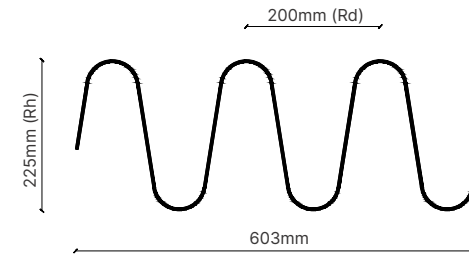

SPECIFICATION EXAMPLE:

Project X

EXTERNAL FINISHES SCHEDULES

CODE	MATERIAL	AREA	DESCRIPTION	COMMENTS	IMAGE	SUPPLIER	REV
EXTERNAL CLADDING							
EC-100	Aluminium Facade Cladding	Facade	Model: SOLIDAL® PMP U3-225 Thickness: T3® (3mm) TBC Perforation Design: Round TBC Perforation Open Area: 50% TBC Perforation Dimension: 10mmØ TBC Perforation Pattern: 45° TBC Colours: Powdercoat Matt finish / Monument TBC	Material: Certified Low Carbon Aluminium Coating Process: Post applied after mill metal formed modules Compliance: Non-combustible NCC2019C1.9. / NATA AS1530.1 & AS1530.3 Certified Recyclability Content: 100% cradle to cradle recyclable product Carbon Footprint: 7.1kgCO ₂ e Certified CQM2023CFP193		SOLIDAL® info@solidal.com 1300252325	1

SOLIDAL® PMP U Series (U4-102)

SOLIDAL® PRODUCT SPECIFICATION

Model	SOLIDAL® PMP U4-102
Material	Certified Low Carbon Aluminium
Carbon Footprint	7.1kgCO ₂ e Certified CQM2023CFP193
Coating Process	Post applied after mill metal formed modules
Recyclability Content	100% cradle to cradle recyclable product

Thickness	T2® (2mm), T3® (3mm), T4® (4mm), T5® (5mm), T6® (6mm)
Max Length	Up to 6000mm* (Custom)
Width	1083mm
Rib Height (Rh)	170mm
Rib Distance (Rd)	360mm

Perforation Design

Round, Square, Triangular, Slotted, Custom Design

Perforation Open Area Porosity

Open Area % available (Non-perforated Optional)

Perforation Dimension

Custom Size available

Perforation Pattern

90°, 45°, 60°, Custom

Attachment Methods:

Fixing Span: up to 6000mm

Mechanically fixed to sub-frame

Optional corner moulds available

Colours and Finishes

Powder Coat (Akzonobel Interpon / Dulux Duratec) or PVDF Wet Spray (P.P.G) in unlimited colours, single side or double side coating. Anodise Finish. (Colour Matching available)

Compliance:

Non-combustible NCC2019C1.9.


NATA AS1530.1 & AS1530.3 Certified

Supplier: SOLIDAL®

Phone number: 1300 252 325

Email: info@solidal.com


SOLIDAL® U4-102

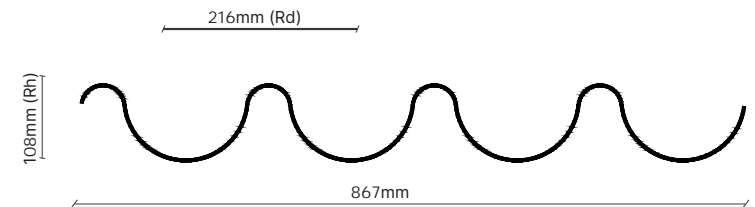

SPECIFICATION EXAMPLE:

Project X

EXTERNAL FINISHES SCHEDULES

CODE	MATERIAL	AREA	DESCRIPTION	COMMENTS	IMAGE	SUPPLIER	REV
EXTERNAL CLADDING							
EC-100	Aluminium Facade Cladding	Facade	Model: SOLIDAL® PMP U4-102 Thickness: T3® (3mm) TBC Perforation Design: Round TBC Perforation Open Area: 50% TBC Perforation Dimension: 10mmØ TBC Perforation Pattern: 45° TBC Colours: Powdercoat Matt finish /Monument TBC	Material: Certified Low Carbon Aluminium Coating Process: Post applied after mill metal formed modules Compliance: Non-combustible NCC2019C1.9. / NATA AS1530.1 & AS1530.3 Certified Recyclability Content: 100% cradle to cradle recyclable product Carbon Footprint: 7.1kgCO ₂ e Certified CQM2023CFP193		SOLIDAL® info@solidal.com 1300252325	1

SOLIDAL® PMP U Series (U4-170)

SOLIDAL® PRODUCT SPECIFICATION

Model	SOLIDAL® PMP U4-170
Material	Certified Low Carbon Aluminium
Carbon Footprint	7.1kgCO ₂ e Certified CQM2023CFP193
Coating Process	Post applied after mill metal formed modules
Recyclability Content	100% cradle to cradle recyclable product

Thickness	T2® (2mm), T3® (3mm), T4® (4mm), T5® (5mm), T6® (6mm)
Max Length	Up to 6000mm* (Custom)
Width	1083mm
Rib Height (Rh)	170mm
Rib Distance (Rd)	360mm

Perforation Design

Round, Square, Triangular, Slotted, Custom Design

Perforation Open Area Porosity

Open Area % available (Non-perforated Optional)

Perforation Dimension

Custom Size available

Perforation Pattern

90°, 45°, 60°, Custom

Attachment Methods:

Fixing Span: up to 6000mm

Mechanically fixed to sub-frame

Optional corner moulds available

Colours and Finishes

Powder Coat (Akzonobel Interpon / Dulux Duratec) or PVDF Wet Spray (P.P.G) in unlimited colours, single side or double side coating. Anodise Finish. (Colour Matching available)

Compliance:

Non-combustible NCC2019C1.9.



NATA AS1530.1 & AS1530.3 Certified

Supplier: SOLIDAL®

Phone number: 1300 252 325

Email: info@solidal.com


SOLIDAL® U4-170

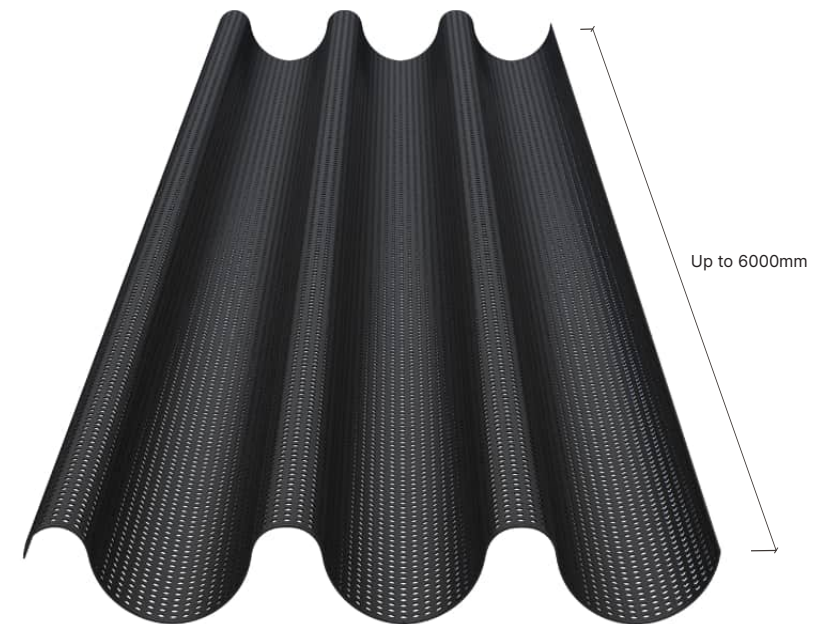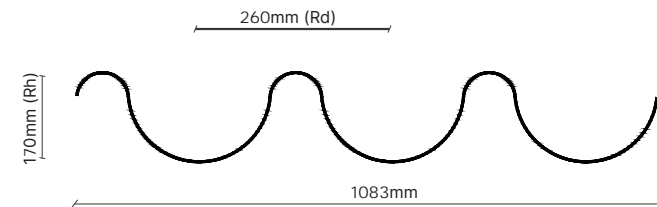

SPECIFICATION EXAMPLE:

Project X

EXTERNAL FINISHES SCHEDULES

CODE	MATERIAL	AREA	DESCRIPTION	COMMENTS	IMAGE	SUPPLIER	REV
EXTERNAL CLADDING							
EC-100	Aluminium Facade Cladding	Facade	Model: SOLIDAL® PMP U4-170 Thickness: T3® (3mm) TBC Perforation Design: Round TBC Perforation Open Area: 50% TBC Perforation Dimension: 10mmØ TBC Perforation Pattern: 45° TBC Colours: Powdercoat Matt finish / Monument TBC	Material: Certified Low Carbon Aluminium Coating Process: Post applied after mill metal formed modules Compliance: Non-combustible NCC2019C1.9. / NATA AS1530.1 & AS1530.3 Certified Recyclability Content: 100% cradle to cradle recyclable product Carbon Footprint: 7.1kgCO ₂ e Certified CQM2023CFP193		SOLIDAL® info@solidal.com 1300252325	1