

# SOLIDAL® PMP V Series (V1)

SOLIDAL® PRODUCT SPECIFICATION

<b>Model</b>	SOLIDAL® PMP V1
<b>Material</b>	Certified Low Carbon Aluminium
<b>Carbon Footprint</b>	7.1kgCO <sub>2</sub> e Certified CQM2023CFP193
<b>Coating Process</b>	Post applied after mill metal formed modules
<b>Recyclability Content</b>	100% cradle to cradle recyclable product

Thickness	T2® (2mm), T3® (3mm), T4® (4mm), T5® (5mm), T6® (6mm)
Max Length	Up to 6000mm* (Custom)
Width	770mm
Rib Height (Rh)	140mm
Rib Distance (Rd)	195mm

## Perforation Design

Round, Square, Triangular, Slotted, Custom Design

## Perforation Open Area Porosity

Open Area % available (Non-perforated Optional)

## Perforation Dimension

Custom Size available

## Perforation Pattern

90°, 45°, 60°, Custom

## Attachment Methods:

Fixing Span: up to 6000mm

Mechanically fixed to sub-frame

Optional corner moulds available

## Colours and Finishes

Powder Coat (Akzonobel Interpon / Dulux Duratec) or PVDF Wet Spray (P.P.G) in unlimited colours, single side or double side coating. Anodise Finish. (Colour Matching available)

## Compliance:


Non-combustible NCC2019C1.9.

NATA AS1530.1 & AS1530.3 Certified

**Supplier:** SOLIDAL®

**Phone number:** 1300 252 325


**Email:** info@solidal.com

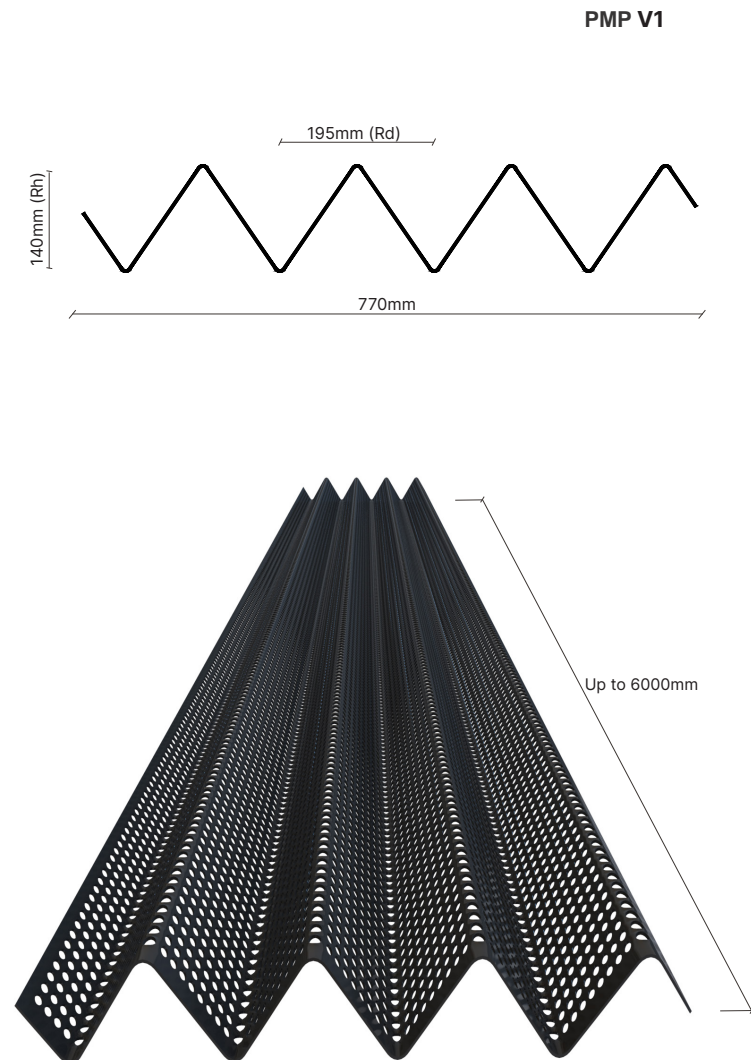

SPECIFICATION EXAMPLE:

Project X

EXTERNAL FINISHES SCHEDULES

CODE	MATERIAL	AREA	DESCRIPTION	COMMENTS	IMAGE	SUPPLIER	REV
<b>EXTERNAL CLADDING</b>							
EC-100	Aluminium Facade Cladding	Facade	<p><b>Model:</b> SOLIDAL® PMP V1  <b>Thickness:</b> T3® (3mm) TBC  <b>Perforation Design:</b> Round TBC  <b>Perforation Open Area:</b> 50% TBC  <b>Perforation Dimension:</b> 10mmØ TBC  <b>Perforation Pattern:</b> 45° TBC  <b>Colour:</b> Powdercoat Matt finish / Monument TBC</p>	<p><b>Material:</b> Certified Low Carbon Aluminium  <b>Coating Process:</b> Post applied after mill metal formed modules</p> <p><b>Compliance:</b> Non-combustible NCC2019C1.9. / NATA AS1530.1 &amp; AS1530.3 Certified</p> <p><b>Recyclability Content;</b> 100% cradle to cradle recyclable product  <b>Carbon Footprint:</b> 7.1kgCO<sub>2</sub>e Certified CQM2023CFP193</p>		<p>SOLIDAL®  info@solidal.com  1300252325</p>	1

# SOLIDAL® PMP V Series (V2)

SOLIDAL® PRODUCT SPECIFICATION

<b>Model</b>	SOLIDAL® PMP V2
<b>Material</b>	Certified Low Carbon Aluminium
<b>Carbon Footprint</b>	7.1kgCO <sub>2</sub> e Certified CQM2023CFP193
<b>Coating Process</b>	Post applied after mill metal formed modules
<b>Recyclability Content</b>	100% cradle to cradle recyclable product

Thickness	T2® (2mm), T3® (3mm), T4® (4mm), T5® (5mm), T6® (6mm)
Max Length	Up to 6000mm* (Custom)
Width	880mm
Rib Height (Rh)	140mm
Rib Distance (Rd)	295mm

## Perforation Design

Round, Square, Triangular, Slotted, Custom Design

## Perforation Open Area Porosity

Open Area % available (Non-perforated Optional)

## Perforation Dimension

Custom Size available

## Perforation Pattern

90°, 45°, 60°, Custom

## Attachment Methods:

Fixing Span: up to 6000mm

Mechanically fixed to sub-frame

Optional corner moulds available

## Colours and Finishes

Powder Coat (Akzonobel Interpon / Dulux Duratec) or PVDF Wet Spray (P.P.G) in unlimited colours, single side or double side coating. Anodise Finish. (Colour Matching available)

## Compliance:

Non-combustible NCC2019C1.9.



NATA AS1530.1 & AS1530.3 Certified

**Supplier:** SOLIDAL®

**Phone number:** 1300 252 325

**Email:** info@solidal.com


PMP V2

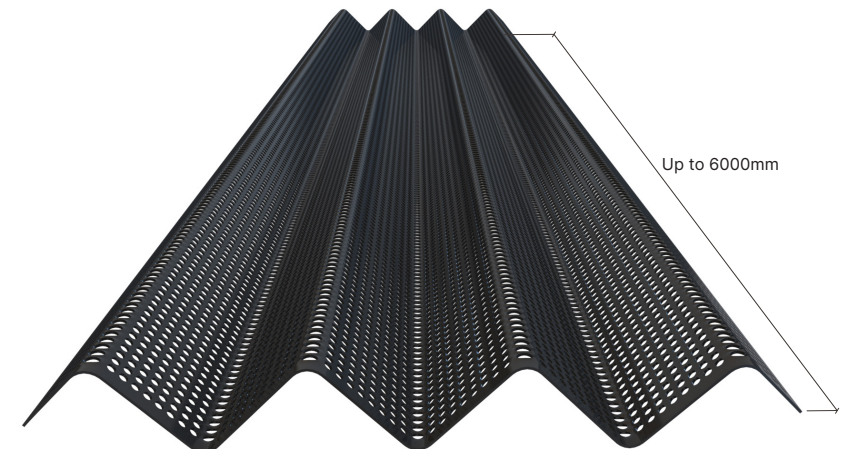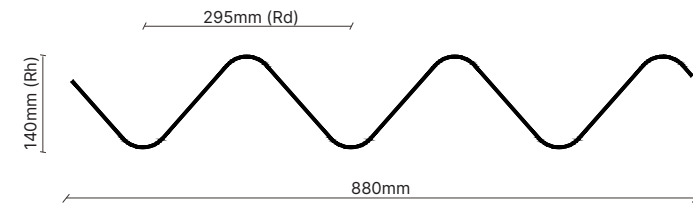

## SPECIFICATION EXAMPLE:

Project X

## EXTERNAL FINISHES SCHEDULES

CODE	MATERIAL	AREA	DESCRIPTION	COMMENTS	IMAGE	SUPPLIER	REV
EXTERNAL CLADDING							
EC-100	Aluminium Facade Cladding	Facade	<b>Model:</b> SOLIDAL® PMP V2 <b>Thickness:</b> T3® (3mm) TBC <b>Perforation Design:</b> Round TBC <b>Perforation Open Area:</b> 50% TBC <b>Perforation Dimension:</b> 10mmØ TBC <b>Perforation Pattern:</b> 45° TBC <b>Colour:</b> Powdercoat Matt finish / Monument TBC	<b>Material:</b> Certified Low Carbon Aluminium <b>Coating Process:</b> Post applied after mill metal formed modules  <b>Compliance:</b> Non-combustible NCC2019C1.9. / NATA AS1530.1 & AS1530.3 Certified  <b>Recyclability Content;</b> 100% cradle to cradle recyclable product <b>Carbon Footprint:</b> 7.1kgCO <sub>2</sub> e Certified CQM2023CFP193		SOLIDAL® info@solidal.com 1300252325	1

# SOLIDAL® PMP V Series (V3)

SOLIDAL® PRODUCT SPECIFICATION

<b>Model</b>	SOLIDAL® PMP V3
<b>Material</b>	Certified Low Carbon Aluminium
<b>Carbon Footprint</b>	7.1kgCO <sub>2</sub> e Certified CQM2023CFP193
<b>Coating Process</b>	Post applied after mill metal formed modules
<b>Recyclability Content</b>	100% cradle to cradle recyclable product

Thickness	T2® (2mm), T3® (3mm), T4® (4mm), T5® (5mm), T6® (6mm)
Max Length	Up to 6000mm* (Custom)
Width	1195mm
Rib Height (Rh)	100mm
Rib Distance (Rd)	300mm

## Perforation Design

Round, Square, Triangular, Slotted, Custom Design

## Perforation Open Area Porosity

Open Area % available (Non-perforated Optional)

## Perforation Dimension

Custom Size available

## Perforation Pattern

90°, 45°, 60°, Custom

## Attachment Methods:

Fixing Span: up to 6000mm

Mechanically fixed to sub-frame

Optional corner moulds available

## Colours and Finishes

Powder Coat (Akzonobel Interpon / Dulux Duratec) or PVDF Wet Spray (P.P.G) in unlimited colours, single side or double side coating. Anodise Finish. (Colour Matching available)

## Compliance:

Non-combustible NCC2019C1.9.



NATA AS1530.1 & AS1530.3 Certified

**Supplier:** SOLIDAL®

**Phone number:** 1300 252 325

**Email:** info@solidal.com


## PMP V3

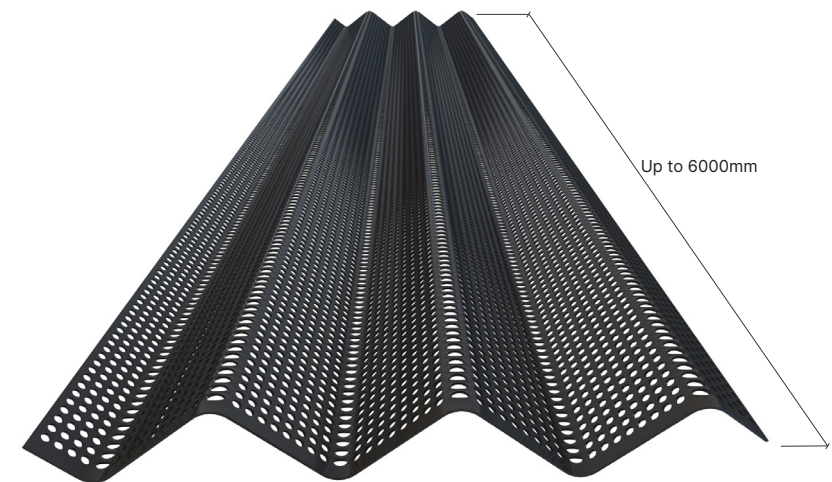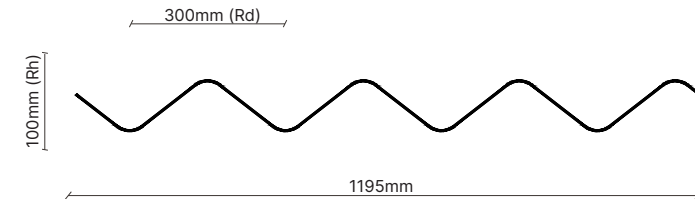

## SPECIFICATION EXAMPLE:

Project X

## EXTERNAL FINISHES SCHEDULES

CODE	MATERIAL	AREA	DESCRIPTION	COMMENTS	IMAGE	SUPPLIER	REV
EXTERNAL CLADDING							
EC-100	Aluminium Facade Cladding	Facade	<b>Model:</b> SOLIDAL® PMP V3 <b>Thickness:</b> T3® (3mm) TBC <b>Perforation Design:</b> Round TBC <b>Perforation Open Area:</b> 50% TBC <b>Perforation Dimension:</b> 10mmØ TBC <b>Perforation Pattern:</b> 45° TBC <b>Colour:</b> Powdercoat Matt finish / Monument TBC	<b>Material:</b> Certified Low Carbon Aluminium <b>Coating Process:</b> Post applied after mill metal formed modules  <b>Compliance:</b> Non-combustible NCC2019C1.9. / NATA AS1530.1 & AS1530.3 Certified  <b>Recyclability Content;</b> 100% cradle to cradle recyclable product <b>Carbon Footprint:</b> 7.1kgCO <sub>2</sub> e Certified CQM2023CFP193		SOLIDAL® info@solidal.com 1300252325	1