


# Sliding door system SlideLine M – overlay




## Technical details in brief

- ▶ Door weight up to 30 kg
- ▶ Doors widths of 300 to 1,800 mm
- ▶ Door heights up to 2,000 mm
- ▶ Door thicknesses of 16 to 25 mm
- ▶ Overlay door position
- ▶ +/- 2 mm height adjustment
- ▶ For wooden, glass or aluminium framed doors
- ▶ Shelf thicknesses 15, 16, 18, 19, 22 and 25 mm suitable
- ▶ Soft closing, soft opening and soft colliding

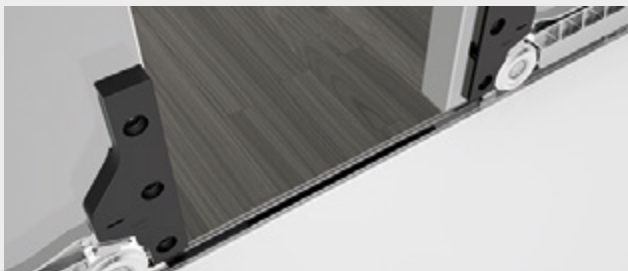

## Furniture with a focus on superior design.

- ▶ Slender 10 mm runner and guide profile leaves a narrow reveal between the sliding door and shelf USP!
- ▶ Stick on decorative tapes in four colours add a finishing touch to the runner profile USP!
- ▶ Design diversity from adapter for glass and aluminium frame doors USP!

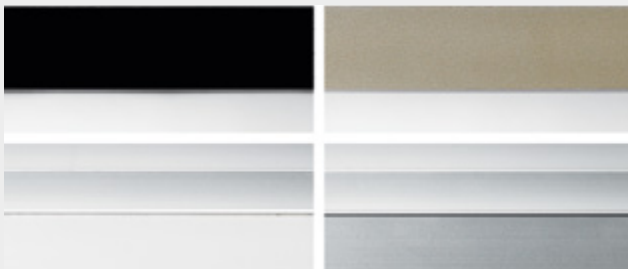

## Experience convenience.

- ▶ Gently slowing down door running action, Silent System integrated on the running component gives SlideLine M the whole variety of soft closing, soft opening and soft colliding USP!
- ▶ Low opening forces
- ▶ Rollers continue to move in virtual silence even after prolonged periods out of use



# Sliding door system SlideLine M – overlay



**Failsafe, straight forward installation.**

- ▶ **Tool-less fast installation of sliding doors** USP!
- ▶ **Integrated Silent System on the running component permits fast, easy installation** USP!
- ▶ **A mounting aid means only one fitter is needed to install the runner profile** USP!
- ▶ **Using the Allen key provided, door height can be adjusted quickly and easily without having to undo the screws first**

