





Max Motor Wattage **45W DC**Max Airflow **19,519m³/hr**

Controller Type 6 speed remote with timer functions

Materials **Durable Aluminium**

Indoor and Covered
Outdoor

Warranty

6 Year Warranty

*3 Year In-Home, 12 Months Remote and Receiver PLUS 3 Year Parts Upon Product Registration

Light Kit - Accessory

Lumen Output	1441lm - 1582lm - 1481lm
Available Colour Temperatures	3000K - 4000K - 5700K
Light Kit Wattage	24W LED
Dimmable	Yes, step dimmable





The Smarter Choice

Operate, monitor, voice control and schedule your fan with Alexa, Google or the free smart app!



Light and Easy

The Alula ceiling fan has a **modern, retrofitable LED light kit available** as an optional accessory for fuss-free install or replacement. Boasting up to **1582 lumens**, this modern light kit is enabled with the latest **tri-colour** tech and is **step dimmable**.



Easy on the Eyes, Ears and Environment

Features a **45W DC Motor**. Both **energy-efficient and quiet**, this smooth operator is also thoughtfully-packaged for a reduced footprint.



Tailor to your Space

With bamboo, teak and koa blade finish options available.




Be Blown Away

With up to 19,519m³/hr of super-smooth airflow, adaptable for ultimate comfort with 6-speed options and timer functions through included remote control.



The Great Outdoors

Made with durable Aluminium, this ceiling fan is made for the harsh Aussie climate, the Alula performs beautifully indoors or covered outdoor spaces.

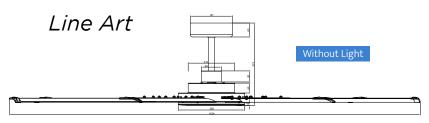









Alula Smart DC

60" 1524mm

CEILING **FAN**

Available Accessories

900mm Extension Rod DC Wall Controller Kit Raked Ceiling Kit Smart Home Adaptor

What's in the box?

Blades 1x Fan 7 x blades

1x Installation & Operation Manual 1x installation & Operation Manual

Packaging

CARTON SIZE: 495mm x 380mm x 243mm

Motor

GROSS WEIGHT: 8.25kg NET WEIGHT: 5.85kg

CARTON SIZE: 665mm x 85mm x 115mm

Blades

GROSS WEIGHT: 4kg NET WEIGHT: 3.5kg

Product Variations

ALU-760B-BK ALU-760W-WH ALU-760B-BA ALU-760B-BA


ALU-760B-KO

ALU-760B-TE

ALU-760B-KO

ALU-760B-TE

Installation Location Chear Sheer To avoid light flicker, your ceiling fan should be at least 1m away from surface mounted lighting Ceiling fan blades For the best performance, your ceiling fan should be at least







must be at least

2.1m from the f loor



1m away from surrounding walls and 1m away from each other