CHRISTIE

CC2 Cooktop

Gas

Christie cooktops are self-contained outdoor cooking appliances that can be ordered with our pre-fabricated Modular or A Series benches, or installed in any custom structure that meets relevant safety standards.

CHRISTIE

Our latest generation CC2 cooktop won an Australian Good Design award and represents the latest evolution in our ongoing development of the ultimate energy-efficient, long-lasting barbecue.



- Mono-pressed, corrosion resistant stainless-steel hotplate and burner for exceptional durability, heat dispersal, and ease of cleaning
- Unique sterilisation cycle for ultimate cooking safety and hygiene
- Highly sensitive micro-processor and control program accurately maintains the optimum cooking temperature while conserving energy
- Intelligent self-diagnostics with fault codes and flashing warnings
- Flame sensor with automatic re-ignition
- Aluminum heat shield reflects 80% of radiant energy from the underside back to the hotplate
- Bayonet and socket fitting for fast, simple, low cost connection
- Cooktops are shipped within five days of order and spare parts within one working day
- Two year Product Warranty backed by our qualified in-house support team

SPECIFICATIONS:

Gas Type	LPG	Natural	ULPG	Min power supply	12.4 VDC
Nominal consumption	16.0MJ/h	15.8MJ/h	12.8MJ/h	Power consumption	800mA ignition, 350mA cooking, 10mA standby
Injector size	1.1 mm	1.8 mm	0.95mm	Nominal target temp	240 degrees
Min / Max supply pressure	2.75 / 3.50kpa	1.13 / 3.50kpa	2.75 / 3.50kpa	Nominal cook time	20 minutes
Operating pressure	2.60kpa	0.84kpa	2.60kpa	Tare/packed weight	21 / 25kg


POWER SUPPLY:

Integrated 12V DC supply rated at a continuous 2A. This supply is optionally:

- 1. 12V 26AH SLA deep-cycle gel cell battery (single appliance)
- 2. 2.5A rated 240V/12V switch mode power supply (single appliance)
- 3. 20W solar panel used in conjunction with option 1 above to recharge the battery

DIMENSIONS:

Please note this cooktop is square

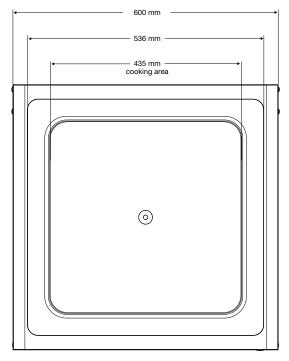

Top view

