

TEGO® VALLEY

Model	TEGO® VALLEY
Product Code	TEGO® V60 V90 V120
Thickness	T3® (3mm)
Material	Certified Low Carbon Aluminium
Carbon Footprint	7.1kgCO ₂ e Certified CQM2023CFP193
Coating Process	Post applied coating after mill metal formed modules
Recyclability Content	100% cradle to cradle recyclable product
Module Stiffeners	Mechanically Fixed
Corner Treatment	Smartwelded Corners
Joint Type	Dry Joint (Rainscreen) or Wet Seal (Concealed)
Joint Width	12-15mm (Custom)

Attachment Methods:


Mechanically fixed through perimeter SOLIDAL® folded flange to sub-frame. (Cleat system optional)

Colours and Finishes:

Powder Coat (Akzonobel Interpon / Dulux Duratec, Fluoraset) or PVDF Wet Spray (P.P.G.) in unlimited colours. Anodised finish. (Colour matching available)

Compliance:

Non-combustible NCC2019C1.9.
NATA AS1530.1 & AS1530.3 Certified

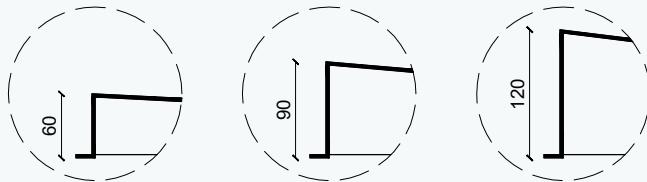

TEGO® PRODUCT CODE

TEGO® V60

TEGO® V90


TEGO® V120

Supplier: SOLIDAL®


Phone number: 1300 252 325

Email: info@solidal.com

Depth (D) mm 60, 90, 120, Custom	Width (W) mm 600, 900, 1200, Custom	Length (L) mm 900, 1200, 3000, 4000, Custom
--	---	---

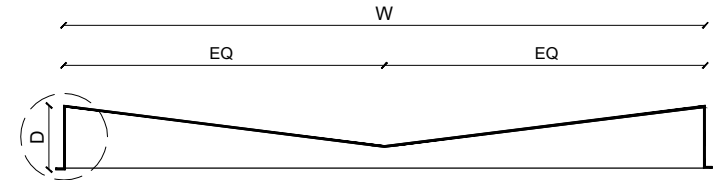


TEGO® MODULE SIZES

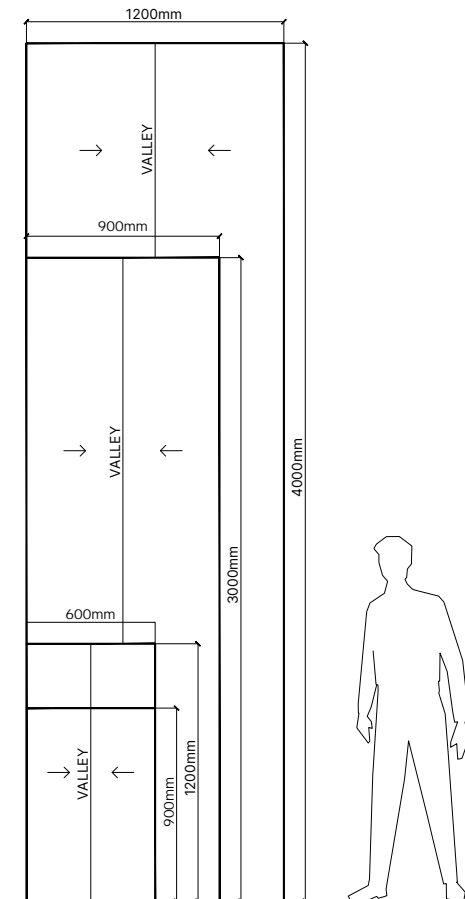

SPECIFICATION EXAMPLE:

Project X

EXTERNAL FINISHES SCHEDULES

CODE	MATERIAL	AREA	DESCRIPTION	COMMENTS	IMAGE	SUPPLIER	REV
EXTERNAL CLADDING							
EC-100	Aluminium Facade Cladding	Facade	<p>Model: TEGO[®] VALLEY Product Code: Mixed V60, V90, V120 TBC Thickness: T3[®] (3mm) Corners: Smartwelded Module Stiffeners: Mechanically Fixed Joint Type: Dry Joint (Rainscreen) Colour: Powdercoat Matt finish / Monument TBC</p>	<p>Coating Process: Post applied coating after mill metal formed modules Compliance: Non-combustible NCC2019C1.9. / NATA AS1530.1 & AS1530.3 Certified Material: Certified Low Carbon Aluminium Recyclability Content: 100% cradle to cradle recyclable product Carbon Footprint: 7.1kgCO_{2e} Certified CQM2023CFP193</p>		<p>SOLIDAL[®] info@solidal.com 1300252325</p> <p>NOTE: No alternative products or systems will be accepted.</p>	1

TEGO® VALLEY OFFSET LEFT

Model	TEGO® VALLEY OS LEFT
Product Code	TEGO® VOS60L VOS90L VOS120L
Thickness	T3® (3mm)
Material	Certified Low Carbon Aluminium
Carbon Footprint	7.1kgCO ₂ e Certified CQM2023CFP193
Coating Process	Post applied coating after mill metal formed modules
Recyclability Content	100% cradle to cradle recyclable product
Module Stiffeners	Mechanically Fixed
Corner Treatment	Smartwelded Corners
Joint Type	Dry Joint (Rainscreen) or Wet Seal (Concealed)
Joint Width	12-15mm (Custom)

Attachment Methods:


Mechanically fixed through perimeter SOLIDAL® folded flange to sub-frame. (Cleat system optional)

Colours and Finishes:

Powder Coat (Akzonobel Interpon / Dulux Duratec, Fluoraset) or PVDF Wet Spray (P.P.G.) in unlimited colours. Anodised finish. (Colour matching available)

Compliance:

Non-combustible NCC2019C1.9.
NATA AS1530.1 & AS1530.3 Certified

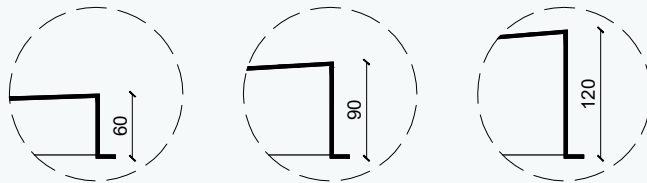


TEGO® PRODUCT CODE TEGO® VOS60L TEGO®VOS90L TEGO®VOS120L

Supplier: SOLIDAL®



Phone number: 1300 252 325

Email: info@solidal.com

Depth (D) mm 60, 90, 120, Custom	Width (W) mm 600, 900, 1200, Custom	Length (L) mm 900, 1200, 3000, 4000, Custom
--	---	---

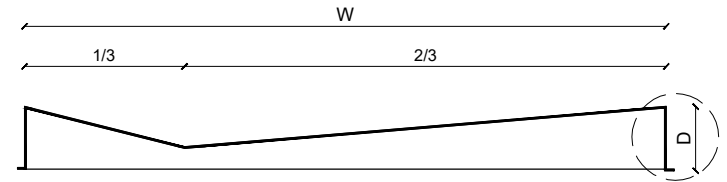


TEGO®MODULE SIZES

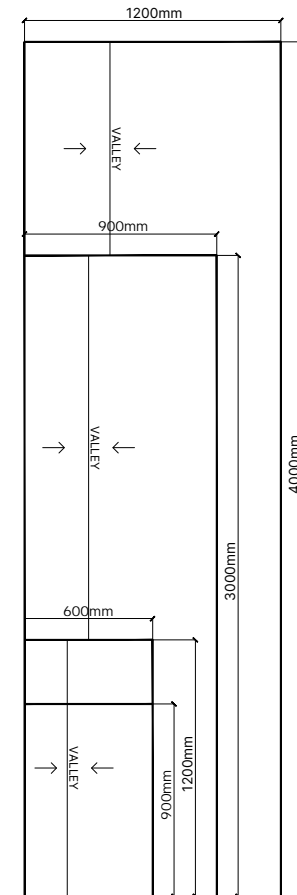

SPECIFICATION EXAMPLE:

Project X

EXTERNAL FINISHES SCHEDULES

CODE	MATERIAL	AREA	DESCRIPTION	COMMENTS	IMAGE	SUPPLIER	REV
EXTERNAL CLADDING							
EC-100	Aluminium Facade Cladding	Facade	<p>Model: TEGO[®] VALLEY OFFSET LEFT Product Code: Mixed VOS60L, VOS90L, VOS120L TBC Thickness: T3[®] (3mm) Corners: Smartwelded Module Stiffeners: Mechanically Fixed Joint Type: Dry Joint (Rainscreen) Colour: Powdercoat Matt finish / Monument TBC</p>	<p>Coating Process: Post applied coating after mill metal formed modules</p> <p>Compliance: Non-combustible NCC2019C1.9. / NATA AS1530.1 & AS1530.3 Certified</p> <p>Material: Certified Low Carbon Aluminium</p> <p>Recyclability Content: 100% cradle to cradle recyclable product</p> <p>Carbon Footprint: 7.1kgCO₂e Certified CQM2023CFP193</p>		<p>SOLIDAL[®] info@solidal.com 1300252325</p> <p>NOTE: No alternative products or systems will be accepted.</p>	1

TEGO® VALLEY OFFSET RIGHT

Model	TEGO® VALLEY OS RIGHT
Product Code	TEGO® VOS60R VOS90R VOS120R
Thickness	T3® (3mm)
Material	Certified Low Carbon Aluminium
Carbon Footprint	7.1kgCO ₂ e Certified CQM2023CFP193
Coating Process	Post applied coating after mill metal formed modules
Recyclability Content	100% cradle to cradle recyclable product
Module Stiffeners	Mechanically Fixed
Corner Treatment	Smartwelded Corners
Joint Type	Dry Joint (Rainscreen) or Wet Seal (Concealed)
Joint Width	12-15mm (Custom)

Attachment Methods:


Mechanically fixed through perimeter SOLIDAL® folded flange to sub-frame. (Cleat system optional)

Colours and Finishes:

Powder Coat (Akzonobel Interpon / Dulux Duratec, Fluoraset) or PVDF Wet Spray (P.P.G.) in unlimited colours. Anodised finish. (Colour matching available)


Compliance:

Non-combustible NCC2019C1.9.
NATA AS1530.1 & AS1530.3 Certified




TEGO® PRODUCT CODE

TEGO® VOS60R



TEGO® VOS90R




TEGO® VOS120R


Supplier: SOLIDAL®

Phone number: 1300 252 325

Email: info@solidal.com

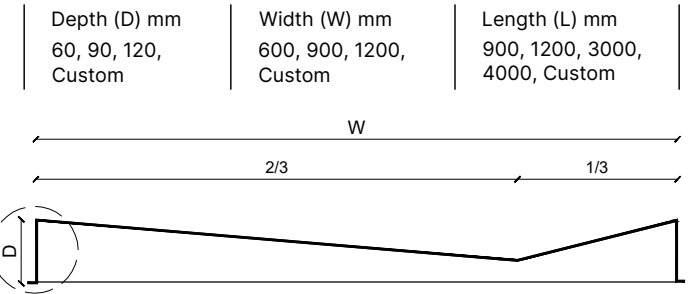


TEGO® MODULE SIZES

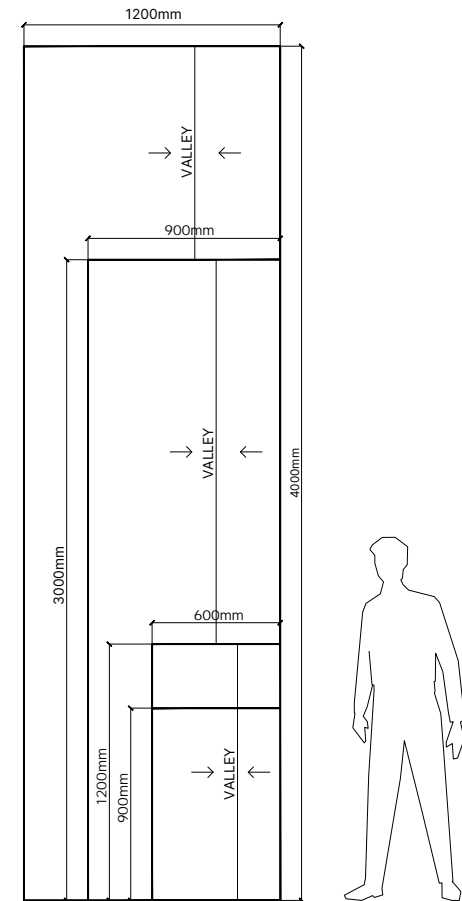

SPECIFICATION EXAMPLE:

Project X

EXTERNAL FINISHES SCHEDULES

CODE	MATERIAL	AREA	DESCRIPTION	COMMENTS	IMAGE	SUPPLIER	REV
EXTERNAL CLADDING							
EC-100	Aluminium Facade Cladding	Facade	<p>Model: TEGO[®] VALLEY OFFSET RIGHT</p> <p>Product Code: Mixed VOS60R, VOS90R, VOS120R TBC</p> <p>Thickness: T3[®] (3mm)</p> <p>Corners: Smartwelded</p> <p>Module Stiffeners: Mechanically Fixed</p> <p>Joint Type: Dry Joint (Rainscreen)</p> <p>Colour: Powdercoat Matt finish / Monument TBC</p>	<p>Coating Process: Post applied coating after mill metal formed modules</p> <p>Compliance: Non-combustible NCC2019C1.9. / NATA AS1530.1 & AS1530.3 Certified</p> <p>Material: Certified Low Carbon Aluminium</p> <p>Recyclability Content: 100% cradle to cradle recyclable product</p> <p>Carbon Footprint: 7.1kgCO_{2e} Certified CQM2023CFP193</p>		<p>SOLIDAL[®] info@solidal.com 1300252325</p> <p>NOTE: No alternative products or systems will be accepted.</p>	1